

## How to change the terminal time zone setting. TS3807 7" terminal

1. Restart the terminal by unplugging the power supply from the grid and then reconnect it to the grid again.

After approx. 10 seconds the terminal will appear as in Screen shot a)


Please wait.
The terminal is starting.....



Screen shot a)



2 After an additional approx. 15 seconds a new screen will appear as shown in screen shot b)

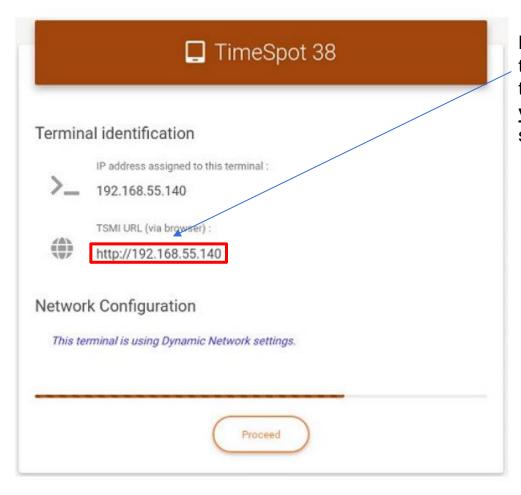

Make a note of the IP address that's shown on **your** terminal screen.

Screen shot b)



3 Now connect a computer to the same network as the terminal is connected to.

4 Then open a web-browser and in the address bar type the IP address of the terminal (see point 2 above).

S TS -38 | Admin ← → C 🛕 Inte säker | 192.168.55 114/tsmi/logi... Type in /tsmi/ after the IP address and click Enter. TimeSpot® Management Interface Screen shot c) will now appear. Please note. This software is under development and testing. Not suitable for production. Username To log in, use admin as Password the Username and admin as the Password. Log in

Screen shot c)



5 In the left-hand side Menu, click on the button "Timezone"

