


## How to manually update terminal software

---

In case you are aware of a Software Update e.g., through direct notification from our Support and/or via a Release Note, please follow the below guidelines.

1. Restart the terminal by unplugging the power supply from the grid and then connect it to the grid again.


After approx. 10 seconds the terminal will appear as in Screen shot a)

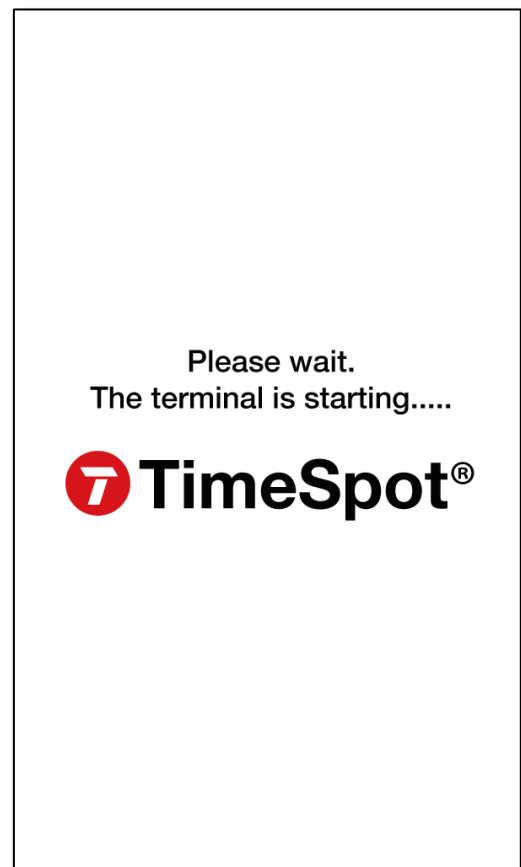

Screen shot a)

- 2 After an additional approx. 15 seconds a new screen will appear as shown in screen shot b)

Make a note of the IP address that is shown on **your** terminal screen.

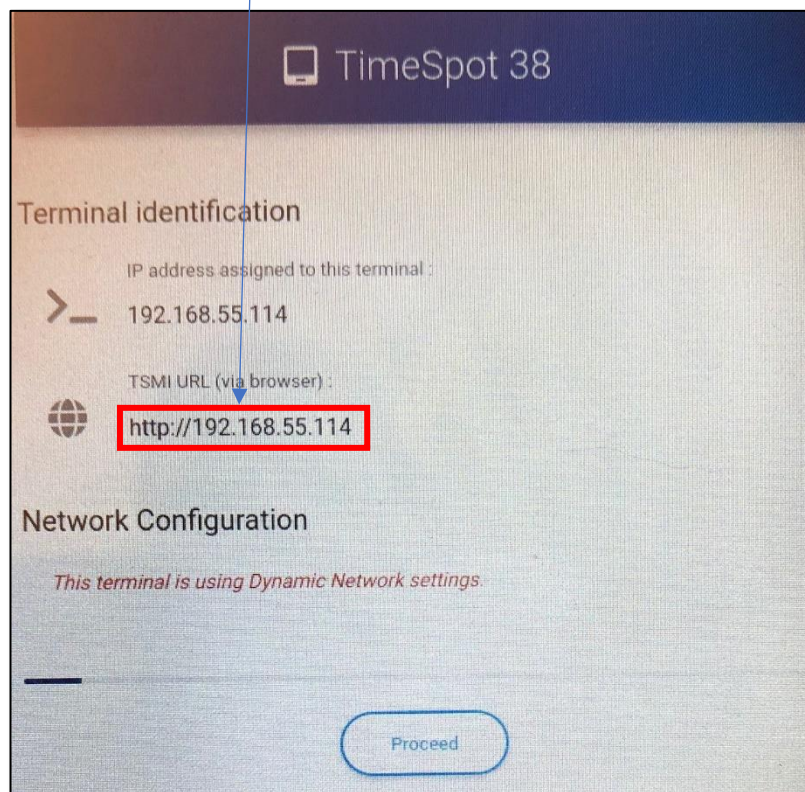

Screen shot b)


Now connect a computer to the same network as the terminal is connected to.

Then open a web-browser and in the address bar type the IP address of the terminal (see point 2 above).

Type in **/tsmi/** after the IP address and click Enter.

Screen shot c) will now appear.

To log in, use **admin** as the Username and **admin** as the Password.

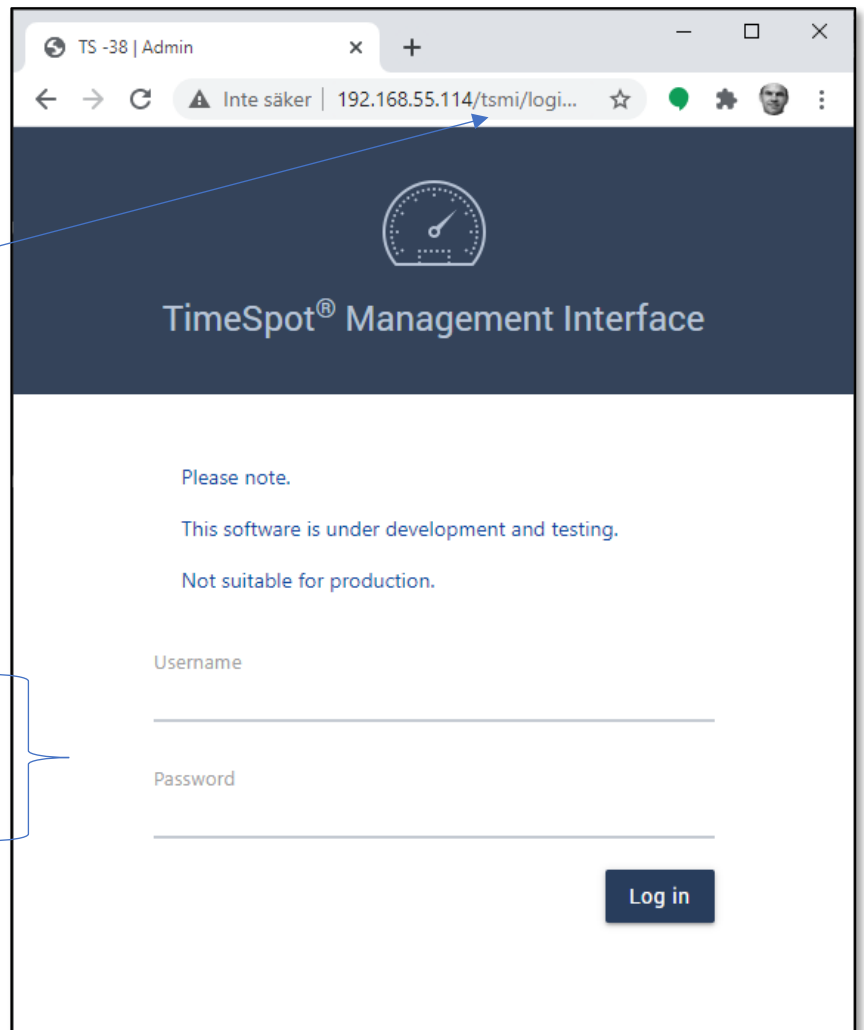

Screen shot c)

- 3 In the left side menu click on the button “Device Url”

In Startup section - click Save

In Browsing data section – click Clear

In the left side menu click on the button “Restart”

- 4 Now the terminal will restart and the new time software will be used.

